

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**




**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b> <b>B65D 1/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 94/25350</b> <b>(43) International Publication Date:</b> 10 November 1994 (10.11.94)
<b>(21) International Application Number:</b> PCT/EP94/01224 <b>(22) International Filing Date:</b> 19 April 1994 (19.04.94) <b>(30) Priority Data:</b> 9308650.2 27 April 1993 (27.04.93) GB <b>(71) Applicant (for AU BB CA GB IE LK MN MW NZ SD TT only):</b> UNILEVER PLC (GB/GB); Unilever House, Blackfriars, London EC4P 4BQ (GB). <b>(71) Applicant (for all designated States except AU BB CA GB IE LK MN MW NZ SD TT):</b> UNILEVER N.V. [NL/NL]; Weena 455, NL-3013 AL Rotterdam (NL). <b>(72) Inventor:</b> HARBOUR, Richard; 105 St. James Avenue, Upton by Chester, Cheshire CH2 1NN (GB). <b>(74) Agent:</b> GORDON, Naoise, Edward; Unilever plc, Patent Division, Colworth House, Sharnbrook, Bedford MK44 1LQ (GB).	<b>(81) Designated States:</b> AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KG, KP, KR, KZ, LK, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>	

**(54) Title:** PLASTICS CONTAINER**(57) Abstract**

A lightweight plastics bottle (1) having a body wall of substantially constant wall thickness and having a plurality of depressed zones (7) having a floor portion (12) spaced inwardly of and parallel to the general plane of the body wall, said depressed zones (7) being arranged in a series of horizontal rows characterised in that the body is non-cylindrical having a number of body panels and that each of said depressed zones (7) has at least one long dimension (9) lying in a direction which is not parallel to the longitudinal axis (10) of the bottle.

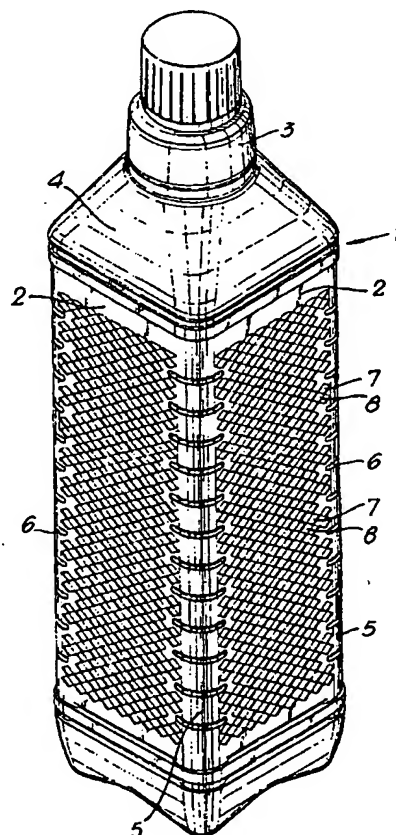

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

PLASTICS CONTAINER

5 This invention relates to thin wall plastics containers  
such as lightweight plastics bottles having a wall  
thickness of between about 0.2mm and 0.6mm.

10 Plastics bottles can be blow-moulded to have thin side  
walls but clearly the stiffness of the side walls of the  
bottle is thereby reduced. There is a risk that the  
filled bottles will bulge or sag when stored, particularly  
in warm temperatures and problems can also arise on the  
filling lines if there is any kind of interruption to the  
passage of the bottles therethrough and a row of bottles  
15 becomes pushed together in a queue compressing the bottles  
at the head of the queue. If the bottles are to be  
enclosed in e.g. a plastics stretch film sleeve, the  
bottle must also resist any compression forces exerted by  
the sleeve significantly distorting the bottle, and  
20 finally the bottle must be sufficiently rigid for the user  
to be able to comfortably handle the bottle without  
compressing it unduly, particularly after the bottle has  
been opened since any compression of a filled bottle can  
readily lead to accidental discharge of some of the  
25 contents.

It has been previously proposed in DE-A-1432253 to provide  
a one-trip plastics bottle having a substantially constant  
wall thickness and a body portion at least a part of which  
30 is provided with a plurality of depressed zones arranged  
in a series of horizontal rows. As illustrated in this  
disclosure the depressed zones are of diamond shape having  
a long dimension disposed vertically with the depressed  
zones in each row being vertically aligned and meeting one  
35 another. Bulging of the side walls is not a problem since  
the body is cylindrical. The orientation of the diamond

- 2 -

shape depressed zones with their long dimensions vertical is in the direction to improve compression or top load strength of the bottle but as shown horizontal lines of weakness exist in the planes passing through the points where the depressed zones of one horizontal row approach the depressed zones of adjacent rows.

According to the present invention there is provided a lightweight plastics bottle having a body wall of substantially constant wall thickness and having a plurality of depressed zones having a floor portion spaced inwardly of and parallel to the general plane of the body wall, said depressed zones being arranged in a series of horizontal rows characterised in that the body is non-cylindrical having a number of body panels and that each of said depressed zones has at least one long dimension lying in a direction which is not parallel to the longitudinal axis of the bottle. The stiffness of the body panels is increased primarily about axes which lie at right angles to the long dimensions of the depressed zones.

Preferably the depressed zones have at least one long dimension lying normal to the longitudinal axis of the bottle so that the stiffness of the body panels about a vertical axis, i.e. to provide bulge resistance, is at least as great as the stiffness of the body panels about a horizontal axis, i.e. in the direction which contributes to the top load strength of the bottle.

The side walls of the depressed zones which connect the floor portion thereof to the body wall are preferably inclined to the plane of the body wall.

The depressed zones can be arranged as discrete zones separated from each other by areas in the general plane of

- 3 -

the body wall, alternate rows of depressed zones being arranged in alternate columns, the distance between alternate rows and alternate columns being less than the maximum dimension of the depressed zones in the direction of the spacing of the rows and columns respectively.

In an alternative arrangement the depressed zones of each row are arranged in vertically aligned columns, the depressed zones having a shape to adjoin adjacent depressed zones in each row and column with the inclined side edges meeting at junctions in a plane other than the plane of the floor portion or the plane of the wall and the junctions of each column and row being separated from one another by body portions in one of said floor or wall planes.

Secondary depressions can be formed at the junctions between at least some of the depressed zones, said secondary depressions having floor portions spaced inwardly of the floor portions of the depressed zones and having inclined edges merging with the inclined edges of the depressed zones and connecting with the body wall. This ensures that the stiffness of the body about axes passing through the secondary depression is maximised.

The depressed zones can be of any convenient shape such as round, oval or polygonal but when the depressed zones of each row are arranged in vertical columns the depressed zones preferably have a polygonal shape such that the corners of the polygons meet one another.

The floor portions of the depressed zones are preferably spaced from the plane of the body wall by between one and eight times the thickness of the wall. The wall thickness is preferably between 0.2mm and 0.5mm, the long dimension of the depressed zone being between 3mm and 8mm. The

- 4 -

depressed zones should not be too deep in relation to their size since stresses may be formed in the material in the blow-moulding process. Small and deep depressed zones are also likely to lead to undue thinning of the material in the blow-moulding.

The invention will now be more particularly described with reference to the accompanying diagrammatic drawings in which

Figure 1 is a perspective view of a lightweight plastics bottle according to one embodiment of the invention;

Figure 2 is a view of an enlarged scale of a part of the wall of the bottle in Figure 1;

Figure 3 is a perspective view of an enlarged scale similar to Figure 2 showing an alternative embodiment of the invention;

Figures 4 and 5 are plan and cross-sectional views respectively of the embodiment of Figure 3;

Figure 6 is a side elevation of a bottle according to the embodiment of Figures 3 to 5; and

Figures 7 and 8 are perspective views on an enlarged scale similar to Figures 2 and 3 showing further embodiments of the invention.

Referring to Figure 1 there is shown a lightweight plastics bottle 1 having four side walls 2. The top of the bottle has a neck closed by a closure cap 3, the neck being connected to the side walls by a shoulder 4.



- 5 -

As seen from above the side walls 2 are joined by radiused corners 5 and to provide rigidity to these corners arcuate grooves 6 are formed at intervals therein.

5 To stiffen the side walls 2 and minimise bulging i.e. minimising any tendency of the bottle to tend towards a circular cross-section, each of the side walls is provided with a series of depressed spacing zones 7 spaced from one another by similarly shaped zones 8 lying in the normal  
10 plane of the side wall 2.

As shown more clearly in the enlarged perspective view of Figure 2 the depressed zones 7 have a rhombus shape with the long dimensions 9 extending at right angles to the  
15 vertical axis 10 of the bottle. The edges 11 of the depressed zones are inclined outwardly from a floor portion 12 and are joined with the floor portions and the normal plane of the side wall by a small radii 13.

20 The depressed zones of each horizontal row are arranged in vertically aligned columns.

The polygonal form of the depressed zones is such that the inclined edges of the depressed zone meets with the edges  
25 of adjacent depressed zones in adjacent columns and rows. More particularly, because of the radii 13 the intersections are formed at a plane intermediate the planes of the floor portions and the normal plane of the side wall. Thus the normal plane of the side wall between  
30 adjacent spacing zones 8 is curved downwardly at 14 and the floor portions curve upwardly at 15 at the intersections. It is thereby ensured that there are no continuous straight lines extending across the side wall in any direction which are not interrupted by a change in  
35 the plane of the material. The depressed zones thus provide a stiffening of the side wall in all directions.

- 6 -

Because the long dimension 9 of the depressions is normal to the longitudinal axis 10 of the bottle the stiffening effect of the series of depressed zones 7 is more effective to stiffen the body wall against bending about the direction of the axis 10 than against bending about axes in the direction of the long dimension 9. The depressed zones are therefore particularly effective in stiffening the body wall against bulge tending to cause the cross-sectional shape of the bottle to become circular.

In order to further strengthen the body panel at the junctions between the spacing zones 8 secondary depressions 16 can be provided at this location as shown in Figures 3 to 6. These secondary depressions 16 have floor portions 17 which as seen in Figure 5 are spaced inwardly of the floor portion 12 of the depressed zones. The depressions have inclined edges 18 which merge with the spacing zones 8 and the inclined edges 11 of the depressed zones with small radii 13.

It will be understood that these depressions 16 are particularly effective in stiffening the side wall against bending along planes 19-19, i.e. in resisting bulging by bending along these planes.

The depressions 16 can however lead to a reduction of the stiffening effect of the depressed zones against bending in the horizontal planes passing through the depressions in a single row. As shown in Figure 6 the depressions 16 are therefore not provided in rows aligned with the recesses 6 in the corners of the bottle since the presence of the recesses 6 aligned with the depressions 16 can lead to undue reduction in the top load strength of the bottle.

- 7 -

Referring now to figure 7, there is shown as alternative arrangement of depressed zones 7 in which the depressed zones are again arranged in horizontal rows but in which depressed zones in alternate rows are arranged in alternate columns with the distance between alternate rows and alternate columns being less than the maximum dimensions of the depressed zones in the direction of the spacing of the rows and columns respectively.

As shown in Figure 7 the depressed zones are each a square, arranged to have a long dimension 9 aligned with the longitudinal axis 10 of the bottle and an identical long dimension 9 at right angles thereto. The spacing between adjacent rows is less than the dimension 9 and the spacing between adjacent columns is also less than the dimension 9. The depressed zones of adjacent rows are thus nested between one another but each of the depressed zones are discrete and separated from one another by areas 2 in the normal plane of the side wall.

As before each depressed zone 7 has a floor portion 12 and inclined edges 11 joining the floor portion 12 to the areas 2 of the side wall, all the intersections of the edges with each other and with the floor portions and the side wall areas 2 being formed with small radii 13.

It will be apparent that the nesting of the rows and columns of depressed zones ensures that all planes of the wall in the direction of the longitudinal axis 10 of the bottle, and all planes at right angles thereto, are interrupted by depressed zones which stiffen the side wall against bending about axes in these directions. Nevertheless it will be apparent that the side wall is not stiffened against bending along a line such as shown at 20 and 21 in Figure 7. The side wall is nevertheless

- 8 -

considerably stiffened against bulging and in respect of top loading.

5 The depressed zones can be of any convenient shape and in the arrangement of Figure 8 the depressed zones 7 are circular. As before the depressed zones have a floor portion 12 and inclined edges 11, the edges joining the floor portion 12 and side wall areas 2 with small radii 13. Whilst this arrangement considerably stiffens the side wall in respect of bulge and top load strength it  
10 allows bending along lines 20 and 21 as in the arrangement of Figure 7.

15 Bottles according to each of the embodiments described above can be made by blow-moulding of a plastics material such as high density polyethylene to have a substantially constant wall thickness in the range of 0.2 to 0.6mm, such bottles being generally known as lightweight bottles. Such bottles having flat side walls are relatively  
20 flexible and can readily be deformed out of their pre-determined shape. By providing depressed zones as described the stiffness of the side walls has been found to be considerably increased and problems arising from bulging of the walls, or compression of the walls during  
25 handling of the bottles both mechanically and by the user have been minimised.

30 The stiffening effect of the depressed zones is obviously dependant upon the depth of the depressed zones and it has been found that this depth should be between one and eight times the thickness of the wall. The depth of the depressed zones is also governed by the size of the depressed zones since otherwise the blow-moulding can lead to undue thinning of the plastics material. Preferably  
35 the depressed zones should have a long dimension of between 3mm and 12mm, particularly between 5mm and 9mm.

- 9 -

Lightweight bottles according to the invention can be provided with a plastics film sleeve for decoration and labelling, the plastics film being stretched to apply to the bottle and subsequently allowed to shrink back to  
5 conform the bottle side walls without causing the side walls to bend inwards. Gaps between the plastics sleeve and the bottle side walls are therefore avoided.

- 10 -

CLAIMS


1. A lightweight plastics bottle having a body wall of substantially constant wall thickness and having a plurality of depressed zones having a floor portion spaced inwardly of and parallel to the general plane of the body wall, said depressed zones being arranged in a series of horizontal rows characterised in that the body is non-cylindrical having a number of body panels and that each of said depressed zones has at least one long dimension lying in a direction which is not parallel to the longitudinal axis of the bottle.
2. A bottle according to claim 1 characterised in that at least one long dimension of the depressed zones lies at right angles to the longitudinal axis of the bottle.
3. A bottle according to claim 1 or claim 2 characterised in that the depressed zones are connected to the body wall by side edges which are inclined to the plane of the wall.
4. A bottle according to any one of the preceding claims characterised in that the depressed zones are arranged as discrete zones separated from one another by areas in the plane of the body wall, alternate rows of depressed zones being arranged in alternate columns, the distance between alternate rows and alternate columns being less than the maximum dimension of the depressed zones in the direction of the spacing of the rows and columns respectively.
5. A bottle according to any one of claims 1 to 3 characterised in that the depressed zones of each row

- 11 -

- are arranged in vertically aligned columns, the depressed zones having a shape to adjoin adjacent depressed zones in each row and column with the inclined side edges meeting at junctions in a plane other than the plane of the floor portion or the plane of the wall and the junctions of each column and row being separated from one another by body portions in one of said floor or wall planes.
- 5
- 10 6. A bottle according to claim 5 characterised in that secondary depressions are formed at the junctions between at least some of the depressed zones, said secondary depressions having floor portions spaced inwardly of the floor portions of the depressed zones
- 15 and having inclined edges merging with the inclined edges of the depressed zones and connecting with the body wall.
- 20 7. A bottle according to any one of the preceding claims characterised in that the floor portions of the depressed zones are spaced from the plane of the wall by between one and eight times the thickness of the wall.
- 25 8. A bottle according to any one of the preceding claims characterised in the wall thickness is between 0.2mm and 0.5mm, the long dimension of the depressed zones being between 3mm and 12mm.

1/5

Fig. 1.

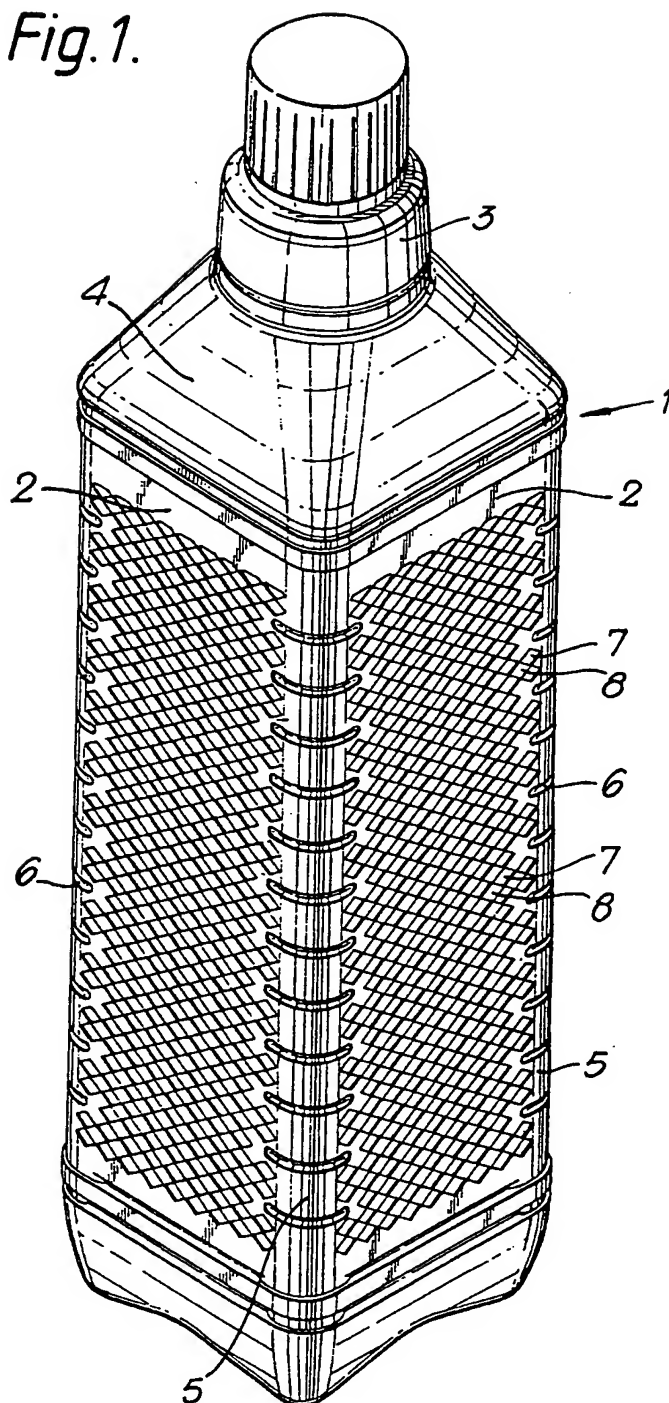



2/5

Fig. 2.


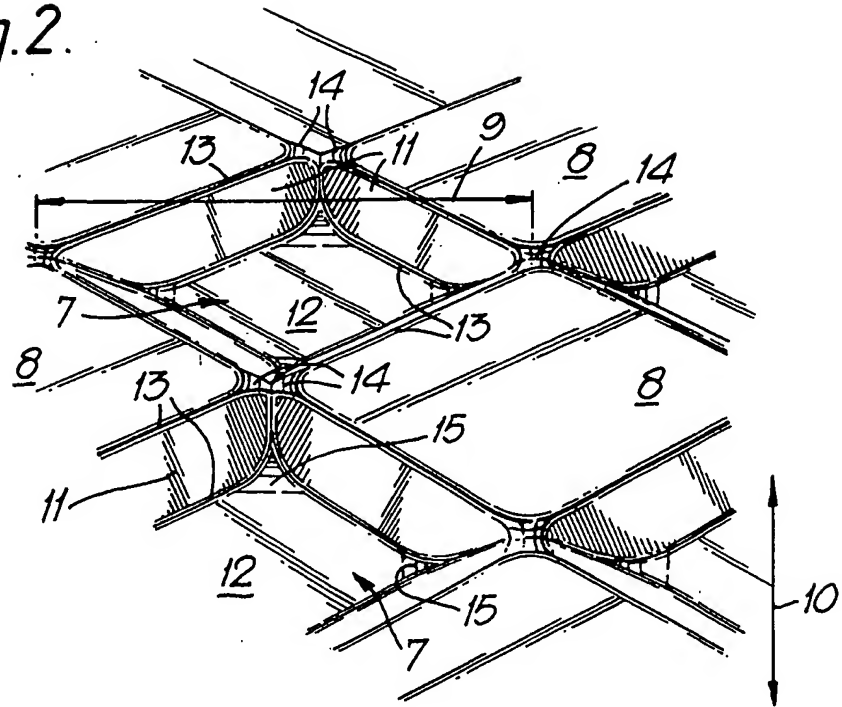


Fig. 3.

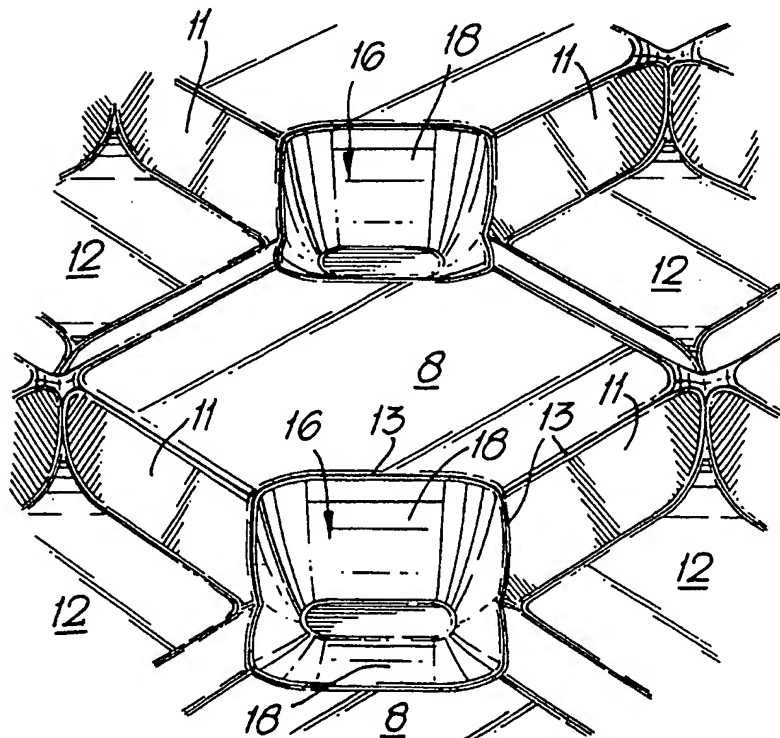

3/5

Fig. 4.



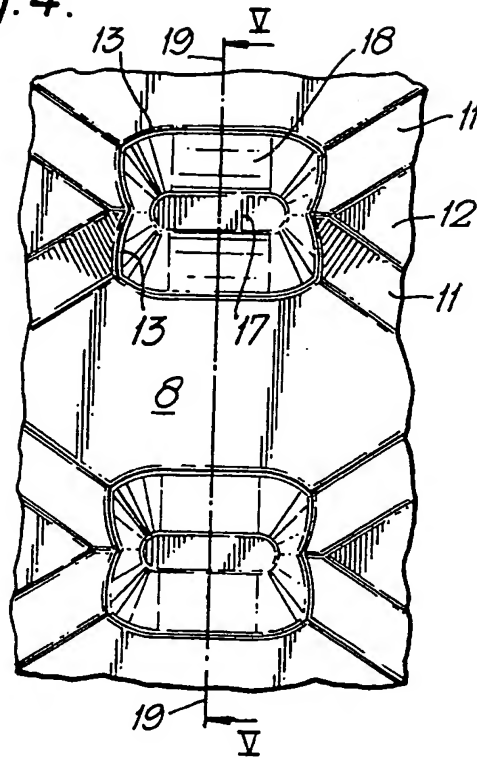


Fig. 5.

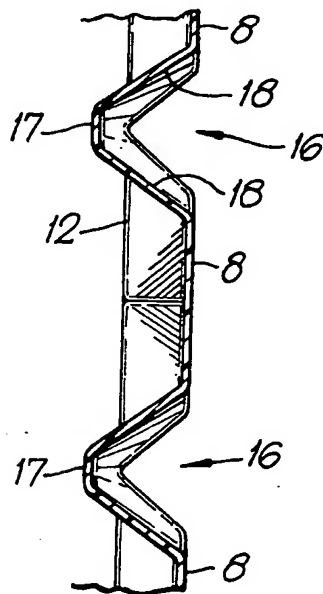

4/5

Fig. 6.

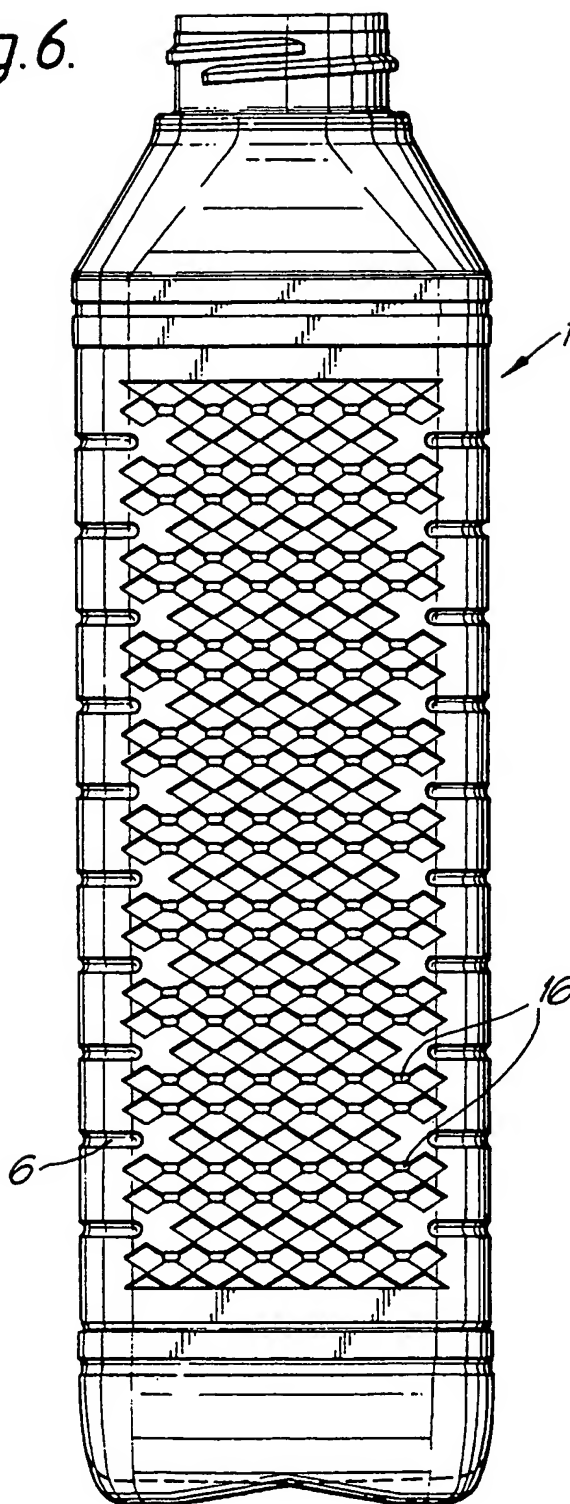

5/5

Fig. 7.


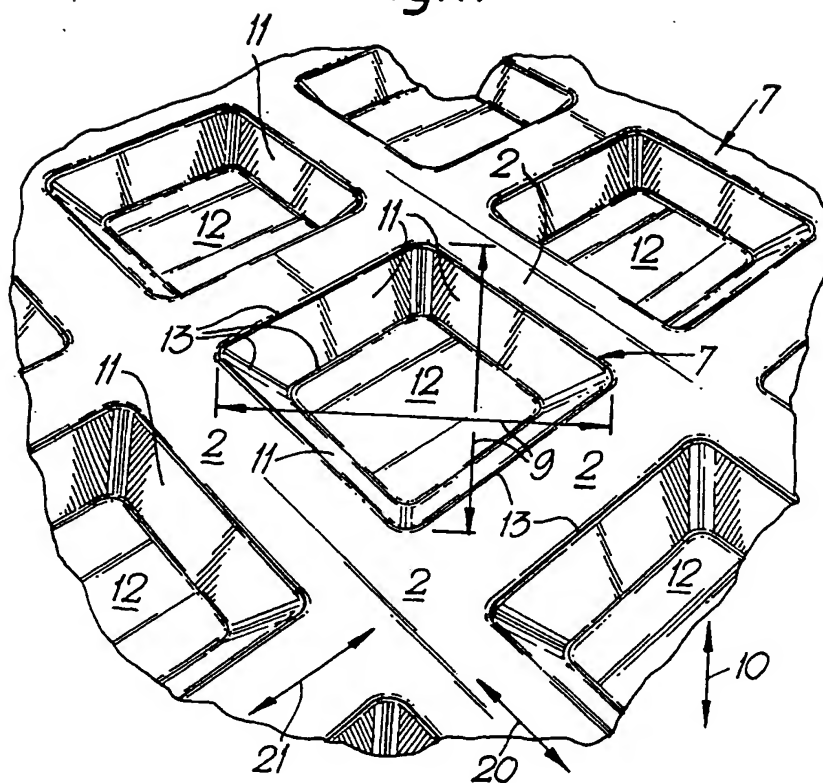


Fig. 8.

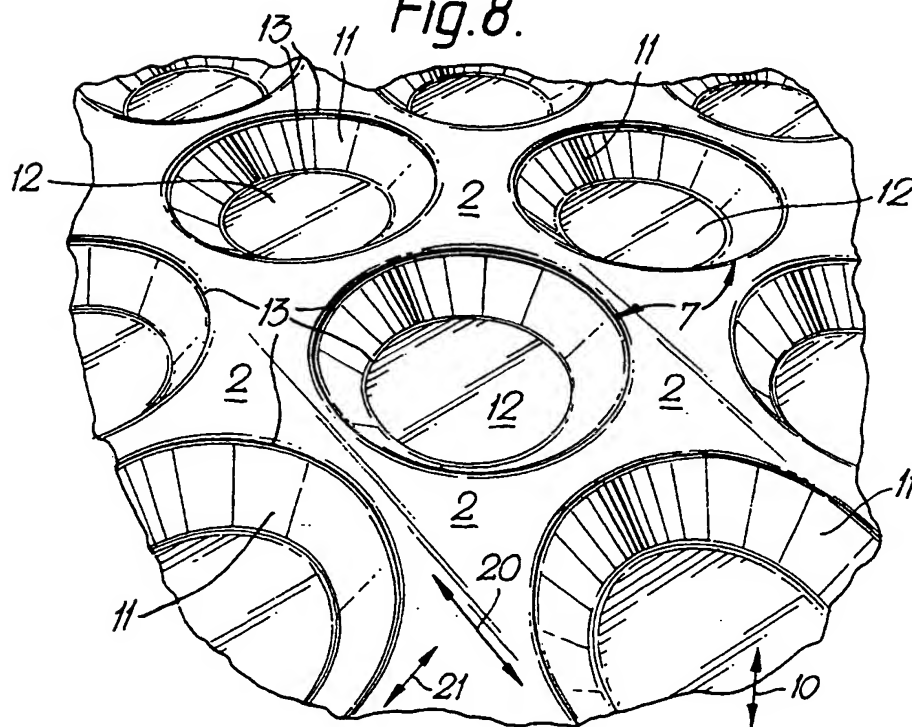

## INTERNATIONAL SEARCH REPORT

In National Application No

PCT/EP 94/01224

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 5 B65D1/02

According to International Patent Classification (IPC) or to both national classification and IPC:

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 5 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE,A,14 32 253 (SCHRÖDER) 14 November 1968 cited in the application see the whole document ---	1
A	FR,A,1 191 951 (LUCKE) 22 October 1959 ---	
A	FR,E,73 893 (LUCKE) 12 September 1960 ---	
A	EP,A,0 446 352 (HAYASHI) 18 September 1991 -----	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

5 August 1994

Date of mailing of the international search report

22. 08. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Fax 31 651 cpo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Martens, L

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Interr. Application No  
PCT/EP 94/01224

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-1432253	14-11-68	BE-A- 632042 FR-A- 1367512 LU-A- 43698 NL-A- 292495	16-07-63 17-02-24
FR-A-1191951		NONE	
FR-E-73893		NONE	
EP-A-0446352	18-09-91	WO-A- 9104912 US-A- 5199588	18-04-91 06-04-93